


SHENZHEN DEP Electronics Co.,Ltd
深圳德平电子有限公司

法兰终端负载 (B)
Flange Teminations(B)

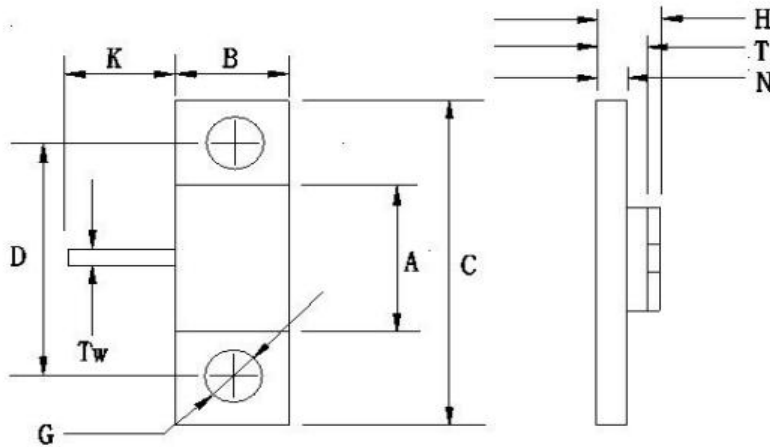

Part Number	Power (W)	Frequency (Ghz)	VSWR	Dimensions (mm)									
				B	A	D	C	N	Tw	T	H	K	G
RFG005B50013G	5	DC-4	1.2	4	4	9	13	0.5	1	1.5	2.4	4	2.2
RFG010B50013J	10	DC-4	1.2	4	4	9	13	0.5	1	1.5	2.4	4	2.2
RFG010B50013G-A	10	DC-6	1.3	4	4	9	13	0.5	1	1.5	2.4	4	2.2
RFG020B50011J	20	DC-4	1.15	4	4	9	13	1	1	2.2	3.3	4	2.2
RFG030B50011J	30	DC-3	1.2	6	6	13	16	0.5	1	1.6	2.8	6	3.2
RFG050B50011J	50	DC-3	1.2	6	6	13	16	0.5	1	1.6	2.8	6	3.2
RFG050B50011J-A	50	DC-3	1.2	6	6	14.2	20	1.5	1	2.6	3.8	6	3.2
RFG060B50011J	60	DC-3	1.2	6	6	14.2	20	1.5	1	2.6	3.8	6	3.2
RFG100B50011J-A	100	DC-3	1.2	6	9	13	16	1	1.5	2.2	3.3	6	3.2
RFG100B50011J	100	DC-3	1.2	6	9	14.2	20	1.5	1.5	2.6	3.8	6	3.2
RFG150B50011J	150	DC-3	1.2	9.5	6.5	14.2	22.1	1.5	1.5	2.6	3.8	6	3.2
RFG200B50011J	200	DC-3	1.2	9.5	9.5	18.4	24.8	3	2.5	4.2	5.5	6	3.2
RFG200B50011J-A	200	DC-3	1.2	10	10	18.4	25	3	3	4.6	5.8	6	3.2
RFG250B50011J-A	250	DC-3	1.2	10	10	18.4	25	3	3	4.6	5.8	6	3.2
RFG250B50011J	250	DC-3	1.2	10	12	18.4	25	3	3	4.6	5.8	6	3.2
RFG250B50011J-P	250	DC-3	1.2	10	12	18.4	25	2	2	4.2	5.5	6	3.2
RFG400B50011G	400	DC-2	1.3	12.7	12.7	22	32	3	3	5.1	6.2	8	4.0
RFG400B50011G-A	400	DC-1	1.25	12.7	12.7	20.5	28	3	3	5.1	6.2	8	4.0
RFG500B50011J	500	DC-1	1.25	12.7	12.7	22	32	3	3	5.1	6.2	8	4.0

电话: 0755-23023733
传真: 0755-85287900

Email: xufei66@dephk.com
<http://www.dephk.com>

